


Profile Overview

To-scale detail drawings in cross-section

Unless otherwise stated, the profiles listed here are made of plastic.


H-Mounting Profile PHMKO12

Opening dimension: 20.5 mm
 Drilled every 300 mm, Ø 5 mm, countersunk
 Length: 3,000 / 6,000 mm
 Color: white (similar to RAL 9016)

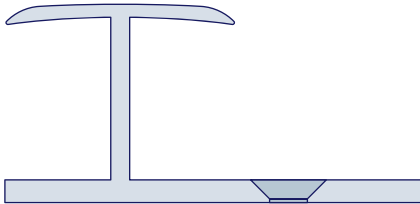


H-Mounting Profile Small PHMKO18

Opening dimension: 12 mm
 Drilled every 300 mm, Ø 5 mm, countersunk
 Length: 3,000 mm
 Color: white (similar to RAL 9016)

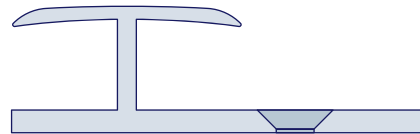


U-Mounting Profile PUMKO10

Opening dimension: 20.5 mm
 Drilled every 300 mm, Ø 5 mm, countersunk
 Length: 6,000 mm
 Color: white (similar to RAL 9016)

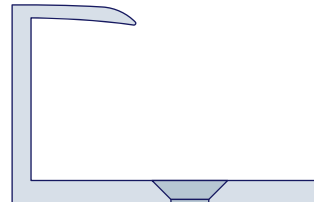

H-Profile PHOKO10

Opening dimension: 20.5 mm
 Material thickness: 1.2 mm
 Length: 6,000 mm
 Color: white (similar to RAL 9016)



U-Profile PUOKO10

Opening dimension: 20.5 mm
 Length: 4,000 mm
 Color: white (similar to RAL 9016)



H-Profile 2-3 mm PHDKO11

For panel thickness 2-3 mm
 Length: 3,000 mm
 Color: white (similar to RAL 9016)



U-Profile 2-3 mm PUDKO11


For panel thickness 2-3 mm
 Länge: 3,000 mm
 Farbe: white (similar to RAL 9016)



Profile Overview


External Corner Profile **PLAKO10**

Unfolded: 50 / 50 mm
Material thickness: 3 mm
Edge folded (89 °)
Length: 6,000 mm
Color: weiß (similar to RAL 9016) 

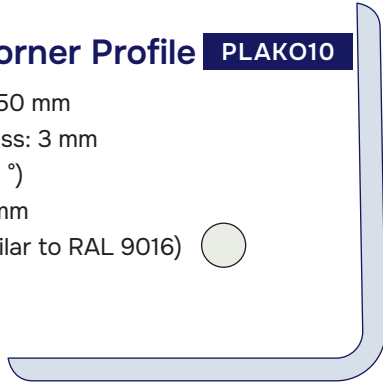

Internal Corner Profile **PLIKO10**

Unfolded: 50 / 50 mm
Material thickness: 3 mm
Edge folded (91°)
Length: 6,000 mm
Color: weiß (similar to RAL 9016) 

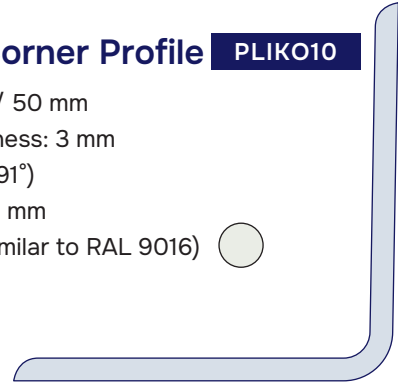


Foldable Angle **PLOKO12**

Unfolded: 60 / 60 mm
Material thickness: 3 mm
Angle foldable for internal corners 45–180° / for external corners 181–315°
Length: 3,500 mm
Color: white (similar to RAL 9016) 



Reinforced H-Profile **PHOKO12**


Opening dimension: 20.5 mm
Material thickness: 2.5 mm
Length: 6,000 mm
Color: white (similar to RAL 9016) 



STEEL PROFILE

Z-Profile galvanized **PZ05310**


Dimensions: 30 / 35 / 29 mm
2 × drilled Ø 6 mm
Material thickness: 0.8 mm
Length: 200 mm

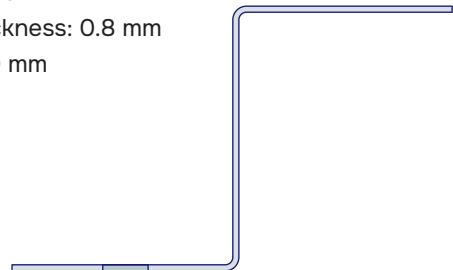

GRP PROFILE

T-Profile (Suspension Profile) **PTDGO11**

Unfolded: 100 / 50 mm
4 × drilled Ø 10 mm
Material thickness: 4 / 6 mm
Length: 5,000 mm
Color (visible side): white (similar to RAL 9016) 

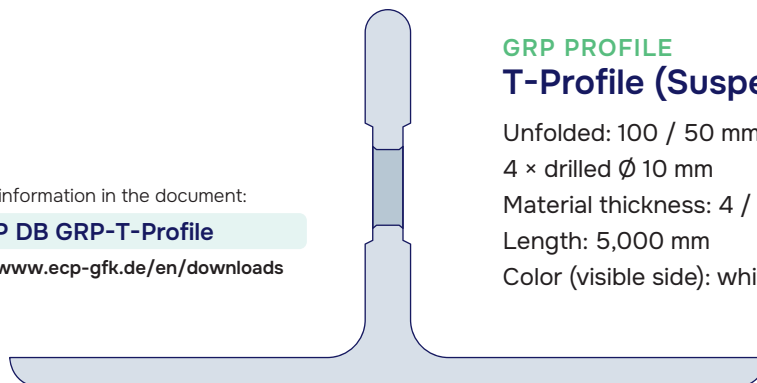

Further information in the document:

 **ECP DB GRP-T-Profile**

Available at www.ecp-gfk.de/en/downloads

Profile Overview

Cove Molding **PLIKO13**

Width: 60 mm

Length: 4,000 mm

Color: white (similar to RAL 9010)



For clipping on, with soft lips

Not recommended for wet cleaning!




Base Clip Profile **PLIKO14**


Dimensions: 30 × 30 mm

Length: 4,000 mm

Mounting profile for cove molding (foam)



In combination

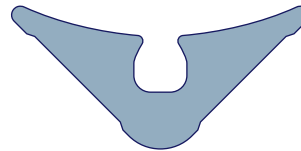

EasyClean Triangular Molding **EASYECKD...**



Internal corner as triangular molding

Dimensions: 61 × 61 mm (with joints)

Surface: GRP 2 mm smooth/textured

Core: EPS

Length: 3,000 mm (other lengths on request)

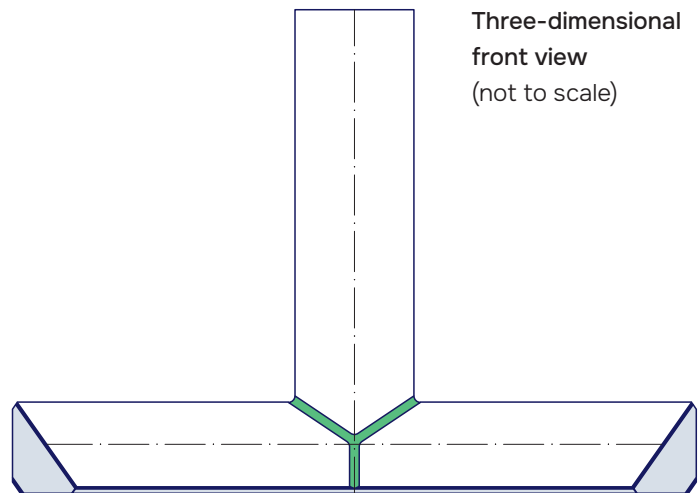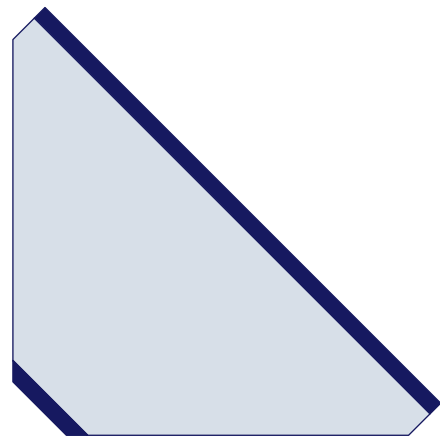

Three-dimensional
front view
(not to scale)

EasyClean 3D Triangular Corner Module

EASYECKD3D...

Internal Corner 3D Module

Dimensions: 300 × 300 × 300 mm

Joints: Pre-sealed with KL 25 Hard Joint

Surface: GRP 2 mm smooth/textured

Core: EPS