


Profile Overview

To-scale detail drawings in cross-section

Unless otherwise stated, the profiles listed here are made of plastic.


H-Mounting Profile PHMK012

Opening dimension: 20.5 mm
 Drilled every 300 mm, Ø 5 mm, countersunk
 Length: 3,000 / 6,000 mm
 Colour: traffic white RAL 9016

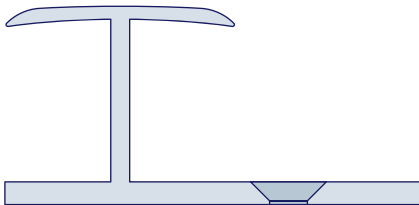


H-Mounting Profile Small PHMK018

Opening dimension: 12 mm
 Drilled every 300 mm, Ø 5 mm, countersunk
 Length: 3,000 mm
 Colour: traffic white RAL 9016

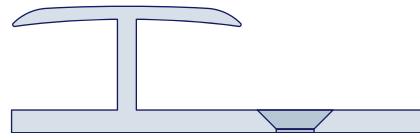


U-Mounting Profile PUMK010

Opening dimension: 20.5 mm
 Drilled every 300 mm, Ø 5 mm, countersunk
 Length: 6,000 mm
 Colour: traffic white RAL 9016



H-Profile PHOK010

Opening dimension: 20.5 mm
 Material thickness: 1.2 mm
 Length: 6,000 mm
 Colour: traffic white RAL 9016



U-Profile PUOK010

Opening dimension: 20.5 mm
 Length: 4,000 mm
 Colour: traffic white RAL 9016



H-Profile 2-3 mm PHDK011

For panel thickness 2-3 mm
 Length: 3,000 mm
 Colour: traffic white RAL 9016




U-Profile 2-3 mm PUDK011

For panel thickness 2-3 mm
 Length: 3,000 mm
 Colour: traffic white RAL 9016




External Corner Profile **PLAKO10**

Unfolded: 50 / 50 mm
 Material thickness: 3 mm
 Edge folded (89°)
 Length: 6,000 mm
 Colour: traffic white **RAL 9016**

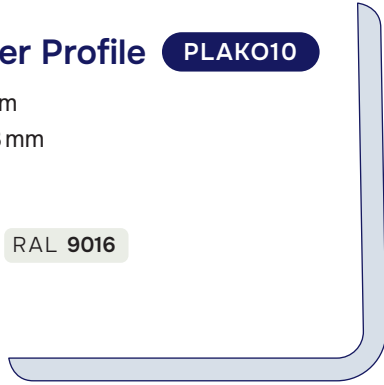**Internal Corner Profile** **PLIKO10**


Unfolded: 50 / 50 mm
 Material thickness: 3 mm
 Edge folded (91°)
 Length: 6,000 mm
 Colour: traffic white **RAL 9016**

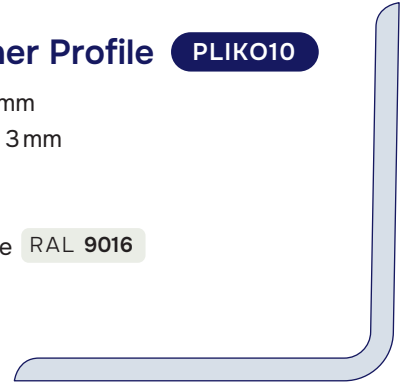**Foldable Angle** **PLOKO12**


Unfolded: 60 / 60 mm
 Material thickness: 3 mm
 Angle foldable for internal corners 45–180° / for external corners 181–315°
 Length: 3,500 mm
 Colour: traffic white **RAL 9016**

**Reinforced H-Profile** **PHOKO12**


Opening dimension: 20.5 mm
 Material thickness: 2.5 mm
 Length: 6,000 mm
 Colour: traffic white **RAL 9016**

**STEEL PROFILE****Z-Profile galvanized** **PZ05310**

Dimensions: 30 / 35 / 29 mm
 2 × drilled Ø 6 mm
 Material thickness: 0.8 mm
 Length: 200 mm

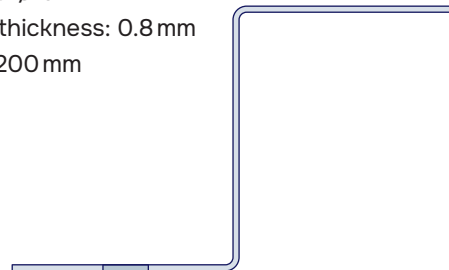**FRP PROFILE****T-Profile (Suspension Profile)** **PTDGO11**

Unfolded: 100 / 50 mm
 4 × drilled Ø 10 mm
 Material thickness: 4 / 6 mm
 Length: 5,000 mm
 Colour (visible side): traffic white **RAL 9016**

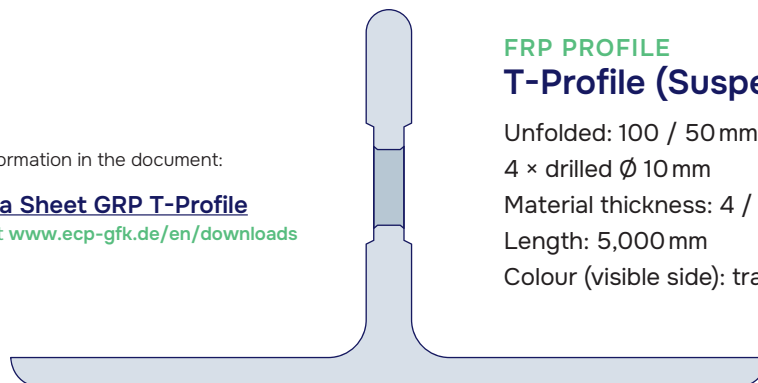

Further information in the document:



ECP Data Sheet GRP T-Profile

Available at www.ecp-gfk.de/en/downloads

Cove Profile **PLIKO13**

Width: 60 mm

Length: 4,000 mm

Colour: traffic white **RAL 9016**



For clipping on, with soft lips

Not recommended for wet cleaning!**Base Clip Profile** **PLIKO14**

Dimensions: 30 × 30 mm

Length: 4,000 mm

Mounting profile for cove moulding (foam)



In combination

EasyClean Triangular Profile **EASYECKD**



Internal corner as a triangular profile

Dimensions: 61 × 61 mm (with joints)

Surface: FRP 2 mm smooth/embossed

Core: EPS

Length: 3,000 mm (other lengths on request)

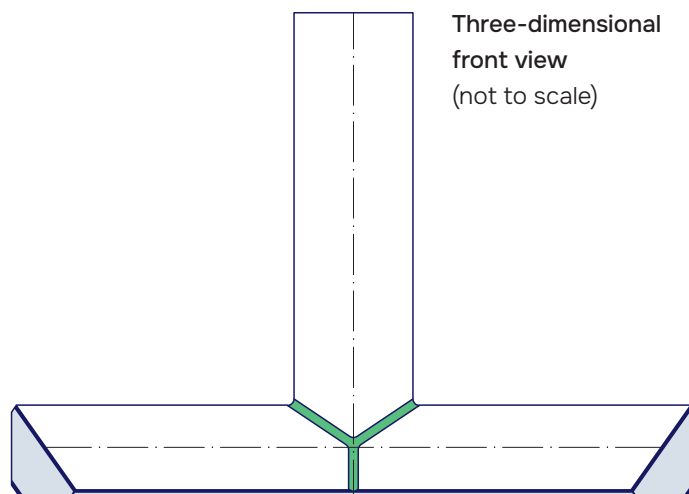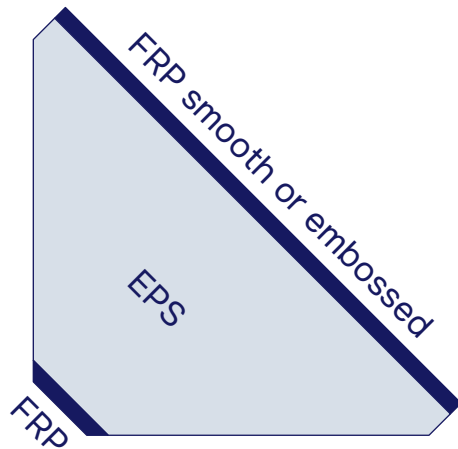Three-dimensional
front view
(not to scale)**EASYECKD3D****EasyClean 3D Triangular Corner Module**

Internal Corner 3D Module

Dimensions: 300 × 300 × 300 mm

Joints: Pre-sealed with KL 25 Hard Joint

Surface: FRP 2 mm smooth/embossed

Core: EPS